

301A011-048

T transition heat-shrinkable shapes

Applications

Used for mechanical protection and cable strain relief. Ideal for cable harness applications where cable branches and breakouts are required.


Materials available

- 3 Semi-rigid modified Polyolefin.
- 4 Flexible modified Polyolefin.
- 12 Modified Fluoro-elastomer.
- 25 Fluid resistant modified Elastomer.
- 100 Low fire hazard material


Coatings available

- 3 & -4 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- 25 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- /225 Pre-coated high temperature curing adhesive.
- 100 - CS1972 Adhesive Tape

A) As supplied



B) After recovery

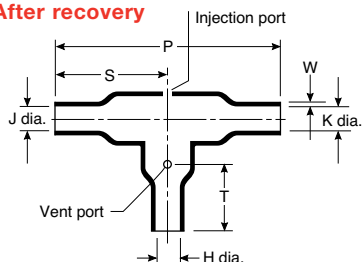

Dimensions (all dimensions are in mm)

| Part Number | A) Dimensions as supplied (min) | | | B) Dimensions after heating recovery (max) | | | | | | | Weight |
|-------------|---------------------------------|------|------|--|------|------|-----------|-----------|-----------|-----------|--------|
| | H | J | K | H | J | K | P ±10% | S ±10% | T ±10% | W ±20% | |
| 301A011 | 6.6 | 6.6 | 6.6 | 3.6 | 3.6 | 3.6 | 29.7 | 15.1 | 10.6 | 1.02 | 1.9g |
| 301A022 | 13.2 | 13.2 | 13.2 | 6.9 | 6.9 | 6.9 | 58.7 | 29.5 | 17.5 | 1.52 | 3.7g |
| 301A028 | 20.0 | 20.0 | 20.0 | 10.2 | 10.2 | 10.2 | 90.0 | 45.0 | 30.0 | 2.0 | - |
| 301A034 | 26.9 | 26.9 | 26.9 | 13.5 | 13.5 | 13.5 | 120.1 | 60.2 | 35.6 | 2.29 | 6.4g |
| 301A048 | 55.6 | 55.6 | 55.6 | 30.2 | 30.2 | 30.2 | 246.4 | 123 | 70.9 | 3.05 | 13.0g |

Ordering Information

- Standard colour: 0 = Black.
- Size selection: To determine the size of the required moulded part, please refer to table.
- Standard packaging: Moulded parts are individually packaged.
- Ordering description: Specify the product name, size, material and coating required.
- Ordering Example: To fit a 15mm cable O/d using -3 material in black = **301A034-3-0**.

Note: For a detailed description on how to construct your moulded part, please refer to the Moulded Parts Numbering Guide. A range of slimline T transitions are also available e.g. 301A51X. For more information please contact us.