



## 562A011-067

### One into four cables transition heat-shrinkable shapes

#### A) As supplied

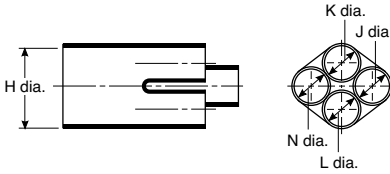

#### B) After recovery



#### Applications

Used for mechanical protection and cable strain relief. Ideal for cable harness applications where multiple cable branches are required.

#### Materials available

- 3 Semi-rigid modified Polyolefin.
- 4 Flexible modified Polyolefin.
- 12 Modified Fluoro-elastomer.
- 25 Fluid resistant modified Elastomer.
- 100 Low fire hazard material.

#### Coatings available

- 3 & -4 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- 25 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- /225 Pre-coated high temperature curing adhesive.
- 100 /86 High performance hot melt adhesive.
- /180 low fire hazard hot melt adhesive.
- CS1972 Adhesive tape

#### Dimensions (all dimensions are in mm)

Part Number	A) Dimensions as supplied (min)			B) Dimensions after heating recovery (max)							
	H	J/K	L/N	H	J/K/L/N	P ±10%	T ±10%	U ±10%	HW ±20%	W ±20%	Weight
562A011	13.2	6.6	6.6	6.9	3.4	24.1	43.9	18.0	1.52	1.02	3.6g
562A022	19.3	9.4	9.4	9.7	5.3	35.6	43.2	23.1	1.78	1.02	6.2g
562A032	19.3	13.2	13.2	9.7	6.9	49.3	50.5	25.4	1.78	1.52	13.6g
562A043	26.9	13.2	13.2	13.0	6.9	49.3	65.8	33.5	2.54	1.52	18.6g
562A054	38.6	19.3	19.3	18.5	9.7	71.9	95.3	46.5	3.05	1.78	54.4g
562A067	55.6	26.9	26.9	26.7	13.0	101.6	135.1	65.5	4.57	2.54	150g

#### Ordering Information

- Standard colour: 0 = Black.
- Size selection: To determine the size of the required moulded part, refer to table.
- Standard packaging: Moulded parts are individually packaged.
- Ordering description: Specify the product name, size, material and coating required.
- Ordering Example: To fit a 11mm cable O/d and four 7mm O/d breakouts using -12 material in black = **562A022-12-0**.

**Note:** For a detailed description on how to construct your moulded part, please refer to the Moulded Parts Numbering Guide.