


PROTECTIVE SLEEVING

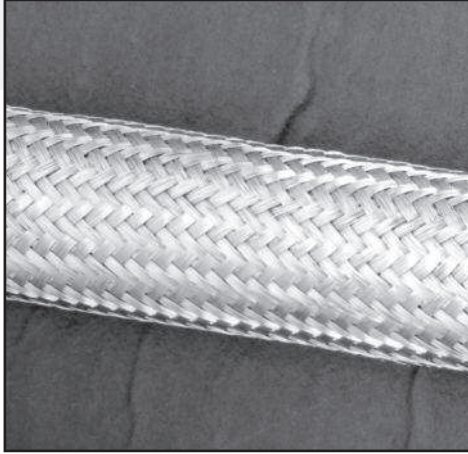

Raybraid

Tubular braiding for electrical EMI/EMC screening

Applications

Ray 90 has a minimum 90% optical coverage and is available in a wide range of sizes to cover 2.0mm to 36.0mm diameters.

Ray 101 and 103 (super flexible) have a minimum 93% and maximum 100% optical coverage with a high usable expansion ratio (minimum 2:1), available in a wide range of sizes to cover 2.5 to 38.0mm diameters.

Standard Ray 90 and Ray 101 are tinned copper and Ray 103 is nickel plated copper for high temperature applications. Ray 101 and Ray 103 are also fully compatible with Tinel Lock™ adaptors for termination of the braid to connectors and backshells.

Features & Benefits

- 90% minimum optical coverage
- Super flexible with high expansion ratios
- Supplied on a plastic former to maintain round profile

Note: For applications that require a limited wire shielding tape which can be wound around a cable for installation and repair, we offer 000W280:

- Roll length : 4.5m
- Roll width : 20mm
- Material: Tinned plated copper

4

Dimensions (dimensions are supplied in mm)

Diameter of former	No. of carriers	Ends per Carrier	Strand Size (AWG/mm)	Min. Optical Coverage (%)	Cable bundle		Pack Size (m)	Description
					Min. (mm)	Max. (mm)		
3.0 (±0.13)	16	5	36/0.13	90	2.0	3.5	100	Ray-90-3.0
4.0 (±0.25)	16	7	36/0.13	90	3.0	5.0	100	Ray-90-4.0
5.0 (±0.25)	24	6	36/0.13	90	4.0	6.0	100	Ray-90-5.0
6.0 (±0.25)	24	7	36/0.13	90	5.0	7.0	100	Ray-90-6.0
10.0 (±0.25)	24	9	34/0.16	90	7.0	12.0	100	Ray-90-10.0
12.5 (±0.25)	24	10	34/0.16	90	11.0	13.0	100	Ray-90-12.5
15.0 (±0.38)	24	11	32/0.20	90	13.0	18.0	50	Ray-90-15.0
20.0 (±0.38)	36	7	30/0.25	90	17.0	23.0	50	Ray-90-20.0
25.0 (±0.38)	36	9	30/0.25	90	22.0	28.0	50	Ray-90-25.0
30.0 (±0.38)	36	9	28/0.32	90	27.0	36.0	50	Ray-90-30.0
3.0 (±0.13)	16	10	38/0.10	93	2.5	5.0	100	Ray-10X-3.0
4.0 (±0.25)	24	7	36/0.13	93	3.5	7.5	100	Ray-10X-4.0
6.0 (±0.25)	24	9	36/0.13	93	4.5	9.5	100	Ray-10X-6.0
7.5 (±0.25)	24	14	36/0.13	93	7.0	14.0	100	Ray-10X-7.5
10.0 (±0.25)	36	12	36/0.13	93	8.0	22.0	100	Ray-10X-10.0
12.5 (±0.25)	36	15	36/0.13	93	11.0	24.0	100	Ray-10X-12.5
20.0 (±0.38)	48	16	36/0.13	93	16.0	38.0	50	Ray-10X-20.0

Note: The X in the part number should be replaced with the type of braid required i.e. Ray101 or Ray103. For more information on the electrical screening product range available, please contact us.